


Feet x .305 = Meters  
 Inches x 25.4 = Millimeters  
 GPM x .227 = Cubic Meters/Hour  
 GPM x 3.785 = Liters/Minute  
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N <sub>S</sub>	Suction	Discharge	No. vanes
VARIOUS	8.25"	ENCLOSED	3"	2400	6"	4"	2

SINGLE VOLUTE

MOUNTING CONFIG.: F, EM

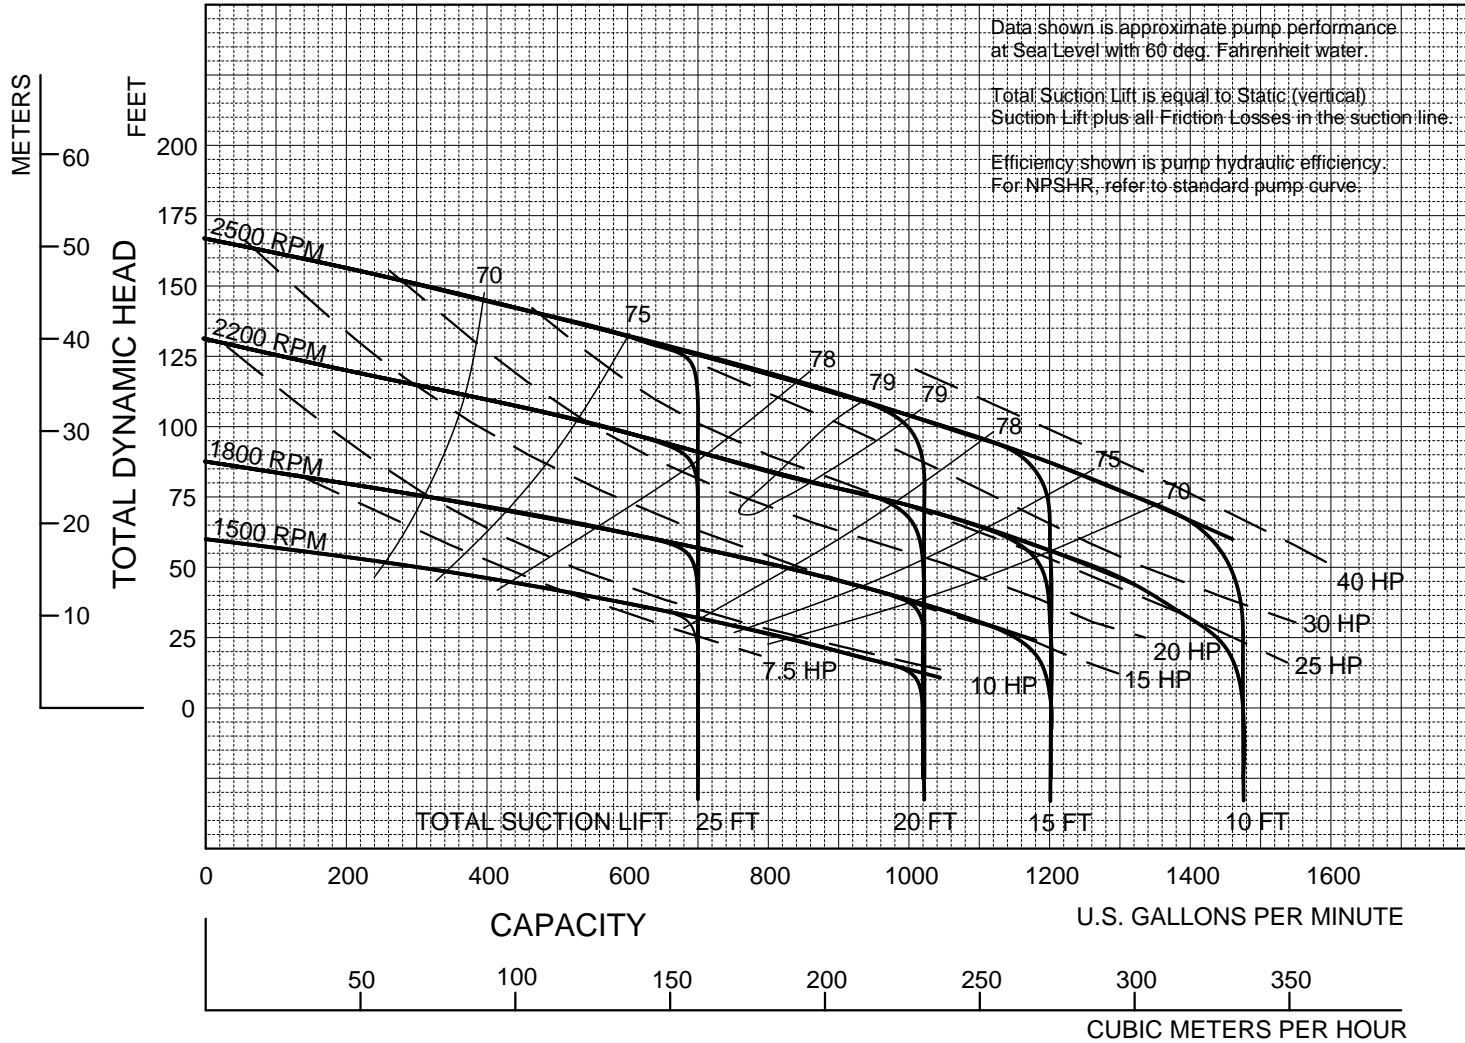

Add 1.5 HP for belt driven diaphragm vacuum pump. Performance curve does not include discharge check valve losses.

Performances shown are for cool water, frame mounted configuration with Cycloseal®. Other liquids or mounting configurations may require performance adjustments.

2/15/01



Cornell Pump Company • Portland, Oregon

4NNTL REDI • PRIME® - VARIOUS RPM

NEW PAGE

4NNTLRPV